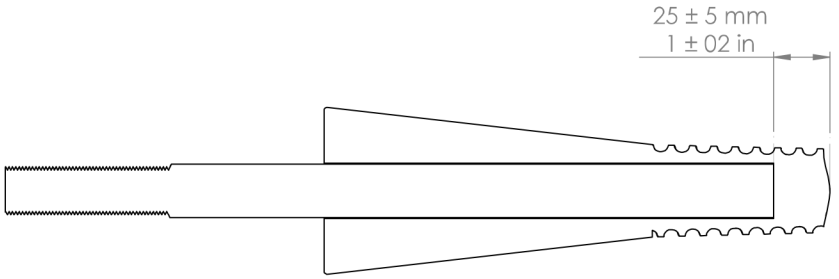

REVIEW INDEX				
N°	NAME	FUNCTION	NOTE	DATE
01	ORLANDO	MANAGER	CHANGED TOLERRANCE ± 4 TO ± 5 mm. CHANGED QUOTA B FOR PIN 35 KV OF 180 P / 175mm	30/07/2012
02	ORLANDO	MANAGER	INCLUDING THE GAP BETWEEN METAL INSERT AND POLYMERIC COMPOUND	15/01/2013
03	JULIO	PROJECTIST	NONE	30/03/2021

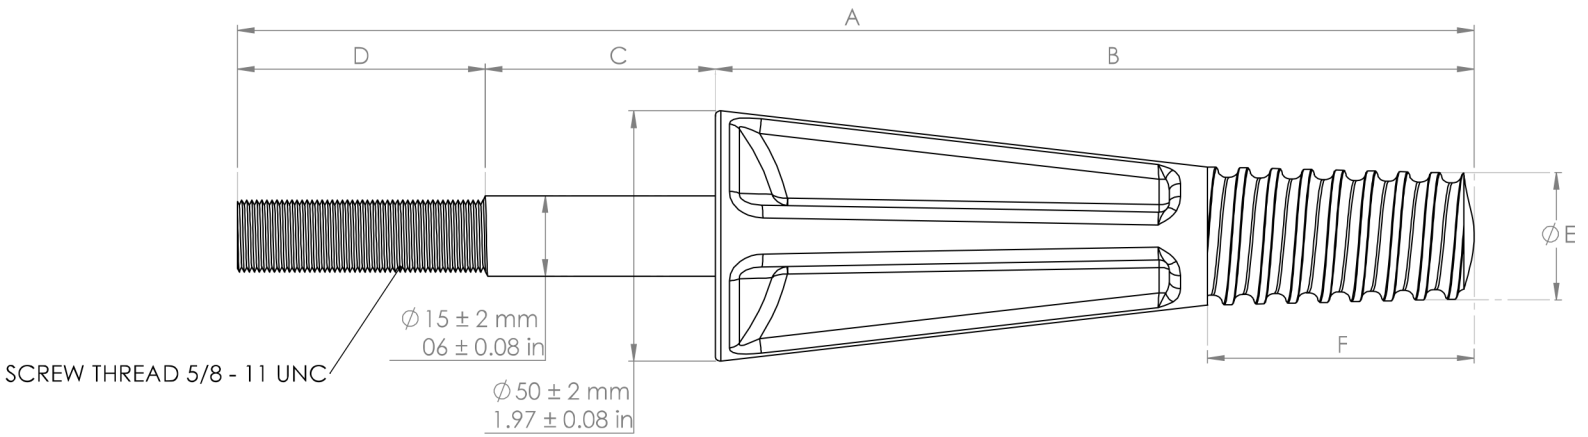

CATALOG No.	NOMINAL VOLTAGE (KV)	WEIGHT		DIMENSIONS											
				A		B		C		D		E		F	
				mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
PP15-185-25G4	15	362g	0.79lb	185±5	7.28	140±5	5.51	0	0	45±5	1.57	25±2	0.98	45±3	1.57
PP35-225-35G4	25/35	474g	1.04lb	225±5	8.85	180±5	7.08	0	0	45±5	1.57	35±2	1.37	45±3	1.57
PP35-225-25G4	25/35	450g	0.99lb	225±5	8.85	180±5	7.08	0	0	45±5	1.57	25±2	0.98	45±3	1.57
PP35-320-35G4	25/35	594g	1.30lb	320±5	12.59	180±5	7.08	80±5	3.14	60±5	2.36	35±2	1.37	45±3	1.57
PP15-280-25G4	15	487g	1.07lb	280±5	11.02	140±5	5.51	80±5	3.14	60±5	2.36	25±2	0.98	45±3	1.57
PP35-320-25G4	25/35	561g	1.23lb	320±5	12.59	180±5	7.08	80±5	3.14	60±5	2.36	25±2	0.98	45±3	1.57

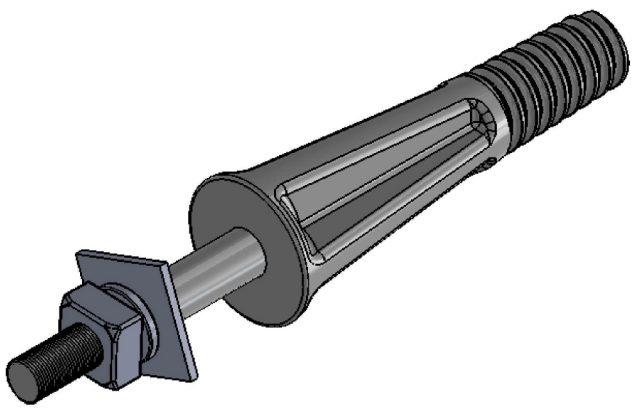

Vanguard ELECTRIC

PRODUCT: POLYMERIC PIN FOR PIN INSULATOR

Material: HDPE / STEEL

Dimensions: mm / in

Revision: 3

PROJ: PEDRO

Execution date: 20/11/2000

Approval: SN.06/09/21 VALDECIR

UTILIZATION: DISTRIBUTION AERIAL SYSTEM

Color: Gray

VANGUARD ELECTRIC, LLC